


Single-row radial ball bearings (continued)

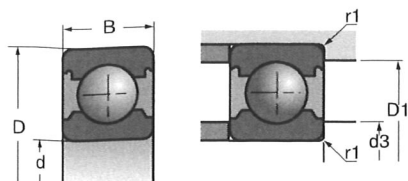

d		D	B				
mm	References	mm	mm	10°N	10°N	rpm*	rpm*
160	6032	240	38	137.00	135.00	2500	3000
	6232	290	48	199.00	203.00	2100	2500
	6332	340	68	300.00	325.00	1800	2200
170	61834	215	22	61.00	73.00	2800	3300
	16034	260	28	123.00	136.00	2400	2900
	6034	260	42	168.00	172.00	2300	2800
	6234	310	52	212.00	224.00	2000	2400
180	61836	225	22	62.00	76.00	2700	3200
	16036	280	31	131.00	146.00	2300	2800
	6036	280	46	188.00	196.00	2100	2700
	6236	320	52	226.00	244.00	1900	2300
190	61838	240	24	69.00	85.00	2500	3000
	16038	290	31	149.00	167.00	2200	2600
	6038	290	46	195.00	213.00	2000	2500
	6238	340	55	255.00	280.00	1800	2100
200	61840	250	24	70.00	88.00	2400	2900
	16040	310	34	175.00	202.00	2000	2400
	6040	310	51	214.00	238.00	1900	2400
	6240	360	58	270.00	310.00	1700	2000
220	61844	270	24	73.00	97.00	2200	2600
240	61848	300	28	92.00	120.00	2000	2400
260	61852	320	28	94.00	128.00	1900	2200
280	61856	350	33	126.00	170.00	1700	2000
300	61860	380	38	148.00	198.00	1600	1900
320	61864	400	38	154.00	213.00	1500	1800
340	61868	420	38	155.00	219.00	1400	1700
360	61872	440	38	160.00	234.00	1350	1600

* These are the speed limits according to the SNR concept (see pages 85 to 87).