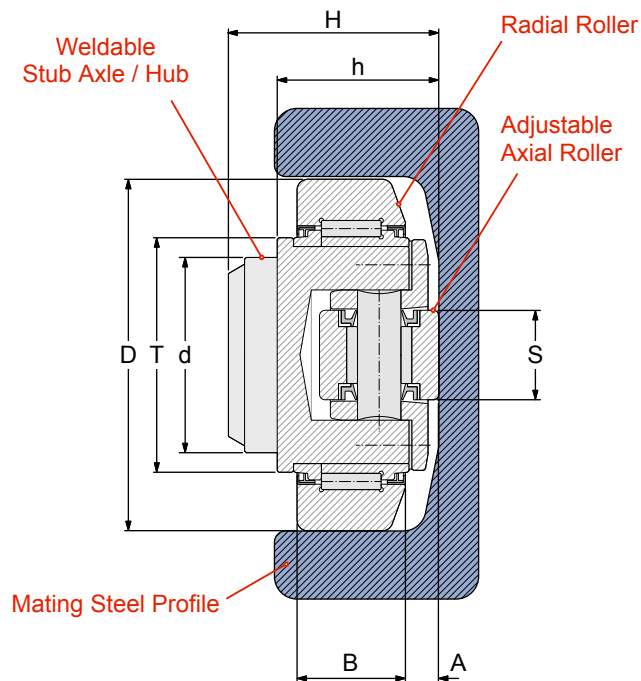


**SHIM ADJUSTABLE
CR BEARINGS**

These combined bearings are adjustable by introducing shims between the hub and the axial roller carrier. This enables the overall height of the bearing to be altered.

BEARING	Dimensions (mm)									C	C ₀	C _a	C _{oa}	PROFILE	PLATE
REFERENCE	D	T	d	H	h	B	A	S	r	kN	kN	kN	kN	REF	REF
4.072	62	42	30	43	33	20	5.5	16	3	31	35.5	8	8	2890	PL 0
4.073	70.1	48	35	48	40	23	6.5	16	4	45.5	51	14	14	2867	PL 1
4.074	77.7	54	40	51	39.5	23	7	21	4	48	56.8	14	14	2810	PL 2
4.075	77.7	54	40	45	34	23	7	21	4	48	56.8	14	14	3019	
4.076	88.4	59	45	61	48	30	7	21	4	68	72	15	15	2811	PL 3
4.077	101.2	67	50	50.5	37.5	28	7	21	5	73	83	18	19	2912	
4.078	107.7	71	55	58.5	44.5	31	8	33	5	81	95	31	36	3100	
4.079	123	80	60	75.8	59.5	37	8	33	5	110	132	31	36	2891	PL 4
4.080	149	103	60	89	69	45	15	50	3	151	192	68	71	2757	PL 6

C = Dynamic Load Capacity for radial roller

C₀ = Static Load Capacity for radial roller

C_a = Dynamic Load Capacity for axial (side) roller

C_{oa} = Static Load Capacity for axial roller