


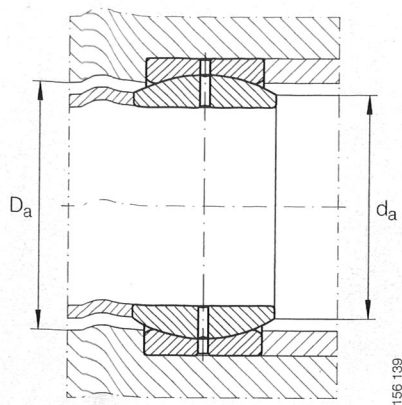
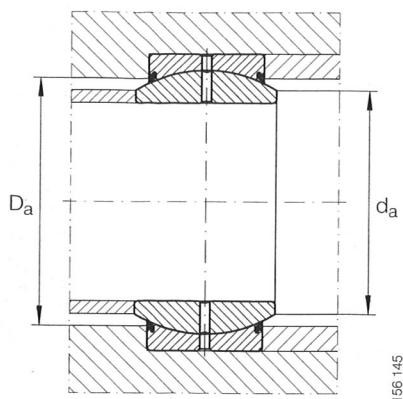




GE..DO — mounting dimensions



GE..DO-2RS — mounting dimensions



Chamfer dimensions		Mounting dimensions		Basic load ratings		Radial internal clearance ³⁾	Shaft diameter
r_{1s} min.	r_{2s} min.	d_a max.	D_a min.	dyn. C kN	stat. C_0 kN		
0,3	0,3	8	9,6	3,4	17	0,032 – 0,068	6
0,3	0,3	10,2	12,5	5,5	27,5	0,032 – 0,068	8
0,3	0,3	13,2	15,5	8,15	40,5	0,032 – 0,068	10
0,3	0,3	14,9	17,5	10,8	54	0,032 – 0,068	12
0,3	0,3	18,4	21	17	85	0,040 – 0,082	15
0,3	0,3	20,7	24	21,2	106	0,040 – 0,082	16
0,3	0,3	20,7	24	21,2	106	0,040 – 0,082	17
0,3	0,3	24,1	27,5	30	146	0,040 – 0,082	20
0,6	0,6	29,3	33	48	240	0,050 – 0,100	25
0,6	0,6	34,2	38	62	310	0,050 – 0,100	30
0,6	1	39,7	44,5	80	400	0,050 – 0,100	35
0,6	1	45	51	100	500	0,060 – 0,120	40
0,6	1	50,7	57	127	640	0,060 – 0,120	45
0,6	1	55,9	63	156	780	0,060 – 0,120	50
1	1	66,8	75	245	1220	0,060 – 0,120	60
1	1	77,8	87	315	1560	0,072 – 0,142	70
1	1	89,4	99	400	2000	0,072 – 0,142	80
1	1	98,1	108	490	2450	0,072 – 0,142	90
1	1	109,5	123	610	3050	0,085 – 0,165	100
1	1	121,2	134	655	3250	0,085 – 0,165	110
1	1	135,5	150	950	4750	0,085 – 0,165	120
1	1	155,8	173	1080	5400	0,085 – 0,165	140
1	1	170,2	191	1370	6800	0,100 – 0,192	160
1,1	1,1	198,9	219	1530	7650	0,100 – 0,192	180
1,1	1,1	213,5	239	2120	10600	0,100 – 0,192	200
1,1	1,1	239,5	267	2320	11600	0,100 – 0,192	220
1,1	1,1	265,3	295	2550	12700	0,100 – 0,192	240
1,1	1,1	288,3	319	3050	15300	0,110 – 0,214	260
1,1	1,1	313,8	342	3550	18000	0,110 – 0,214	280
1,1	1,1	336,7	370	3800	19000	0,110 – 0,214	300