


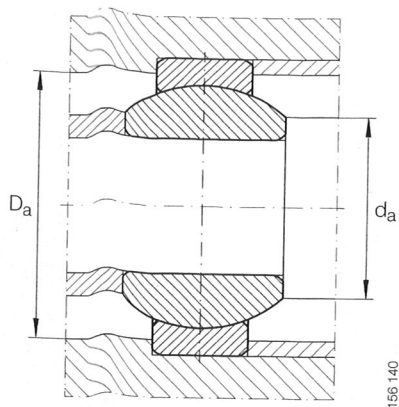
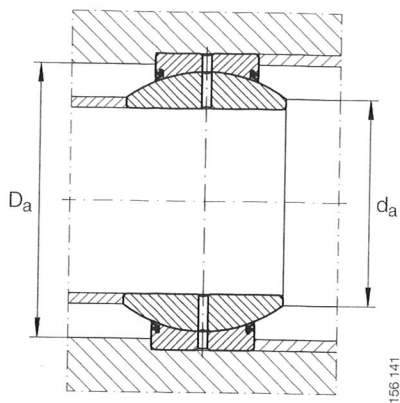






GE..FO – mounting dimensions



GE..FO-2RS – mounting dimensions



Chamfer dimensions		Mounting dimensions		Basic load ratings		Radial internal clearance ⁴⁾	Shaft diameter
r _{1s} min.	r _{2s} min.	d _a max.	D _a min.	dyn. C kN	stat. C ₀ kN		
0,3	0,3	9,3	12,5	5,5	27,5	0,032 – 0,068	6
0,3	0,3	11,6	15,5	8,15	40,5	0,032 – 0,068	8
0,3	0,3	13,4	17,5	10,8	54	0,032 – 0,068	10
0,3	0,3	16	21	17	85	0,040 – 0,082	12
0,3	0,3	19,2	24	21,2	106	0,040 – 0,082	15
0,3	0,3	21	27,5	30	146	0,040 – 0,082	17
0,6	0,6	25,2	33	48	240	0,050 – 0,100	20
0,6	0,6	29,5	38	62	310	0,050 – 0,100	25
0,6	1	34,4	44,5	80	400	0,050 – 0,100	30
0,6	1	39,7	51	100	500	0,060 – 0,120	35
0,6	1	44,7	57	127	640	0,060 – 0,120	40
0,6	1	50	63	156	780	0,060 – 0,120	45
0,6	1	57,1	75	245	1220	0,060 – 0,120	50
1	1	67	87	315	1560	0,072 – 0,142	60
1	1	78,2	99	400	2000	0,072 – 0,142	70
1	1	87,1	108	490	2450	0,072 – 0,142	80
1	1	98,3	123	610	3050	0,085 – 0,165	90
1	1	111,2	134	655	3250	0,085 – 0,165	100
1	1	124,8	150	950	4750	0,085 – 0,165	110
1	1	138,4	173	1080	5400	0,085 – 0,165	120
1	1	151,9	191	1370	6800	0,100 – 0,192	140
1	1,1	180	219	1530	7650	0,100 – 0,192	160
1,1	1,1	196,1	239	2120	10600	0,100 – 0,192	180
1,1	1,1	220	267	2320	11600	0,100 – 0,192	200
1,1	1,1	243,6	295	2550	12700	0,100 – 0,192	220
1,1	1,1	263,6	319	3050	15300	0,110 – 0,214	240
1,1	1,1	283,6	342	3550	18000	0,110 – 0,214	260
1,1	1,1	310,6	370	3800	19000	0,110 – 0,214	280