


Take-up housing units

Flake graphite
cast iron housing
Guide tube
With adjusting screw

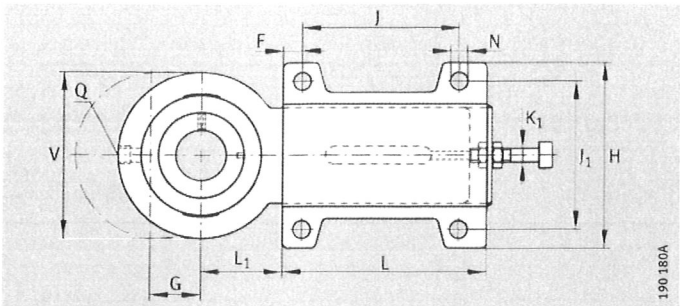

PHUSE...XL(-N)

Dimension table - Dimensions in mm														
Designation				Mass	Dimensions									
Unit	Housing	Guide tube	Radial insert ball bearing		d	H	J	J ₁	L	L ₁	A	A ₂	H ₁	N
				m ≈ kg										
PHUSE25-XL	HUE05	HUSE07	GRAE25-XL-NPP-B	2,07	25	103	140	80	187	50	28	22	52	11,5
PHUSE30-XL	HUE06	HUSE07	GRAE30-XL-NPP-B	2,22	30	103	140	80	187	50	28	22	52	11,5
PHUSE35-XL	HUE07	HUSE07	GRAE35-XL-NPP-B	2,46	35	103	140	80	187	50	28	22	52	11,5
PHUSE40-XL	HUE08	HUSE10	GRAE40-XL-NPP-B	4,89	40	130	180	100	256	60	36	30	60	14
PHUSE50-XL-N	HUE10	HUSE10	GRAE50-XL-NPP-B	5,25	50	130	180	100	256	60	36	30	60	14

1) End cap KASK10 must be ordered separately.
The cap is suitable for temperatures from -20 °C to +80 °C.