


Email: sales@crossmorse.com
Fax: +44 121 325 1079
Tel: +44 121 360 0155

Clamping Elements Type RCK 70




These shaft clamping elements are designed to give optimum concentricity, both radially and axially. Similar in design to the RCK 13, but with increased length to provide improved support, and reduced pressures on both shaft and hub. These units must always be installed inside the hub to ensure optimum concentricity. Axial movement of hub will occur during clamping operation.



Recommended tolerances for full torque transmission are:-

Shaft h8
Hub H8

Clamping surfaces to be finished to $R_z \leq 15 \mu\text{m}$.

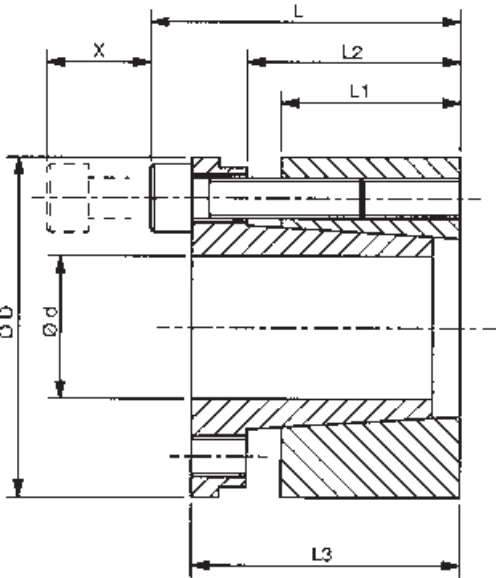

X = Distance required to remove screws, additional clearance for alan key may be required.

Dimensions

Part No.	Dimensions mm							Torque Cap. M Nm	Axial Force F kN	Surface Pressure		Clamping Screws		Approx. Weight kg	Min. Hub Dia* mm		
	d	D	L	L ₁	L ₂	L ₃	X			Shaft Ps N/mm ²	Hub Ph N/mm ²	Size	Torque Nm		Assy Type A	Assy Type B	Assy Type C
RCK70-19x47	19	47	45	26	31	39	25	403	42	228	98	M6	17	0.38	64	60	57
RCK70-20x47	20	47	45	26	31	39	25	443	44	226	98	M6	17	0.37	64	60	57
RCK70-22x47	22	47	45	26	31	39	25	510	46	215	93	M6	17	0.36	63	60	56
RCK70-24x50	24	50	45	26	31	39	25	607	51	215	102	M6	17	0.39	70	65	61
RCK70-25x50	25	50	45	26	31	39	25	689	55	225	102	M6	17	0.38	70	65	61
RCK70-28x55	28	55	45	26	31	39	25	826	59	215	107	M6	17	0.45	78	72	67
RCK70-30x55	30	55	45	26	31	39	25	865	58	196	117	M6	17	0.42	81	74	69
RCK70-32x60	32	60	45	26	31	39	25	1129	71	225	111	M6	17	0.52	86	80	74
RCK70-35x60	35	60	45	26	31	39	25	1177	67	196	116	M6	17	0.48	88	81	75
RCK70-38x65	38	65	45	26	31	39	25	1451	76	205	121	M6	17	0.57	97	89	82
RCK70-40x65	40	65	45	26	31	39	25	1537	77	196	122	M6	17	0.54	97	89	82
RCK70-42x75	42	75	55	30	36	47	30	2314	110	232	137	M8	41	0.91	119	107	98
RCK70-45x75	45	75	55	30	36	47	30	2657	118	232	137	M8	41	0.89	119	107	98
RCK70-48x80	48	80	55	30	36	47	30	2775	116	213	132	M8	41	1.00	124	113	103
RCK70-50x80	50	80	55	30	36	47	30	3011	120	213	132	M8	41	0.95	124	113	103
RCK70-55x85	55	85	55	30	36	47	30	3729	136	218	142	M8	41	1.02	137	123	112
RCK70-60x90	60	90	55	30	36	47	30	3949	132	194	153	M8	41	1.11	151	135	121
RCK70-65x95	65	95	55	30	36	47	30	4970	153	208	137	M8	41	1.19	150	136	124
RCK70-70x110	70	110	67	40	46	57	35	8128	232	220	140	M10	83	2.20	176	159	144
RCK70-75x115	75	115	72	40	46	62	35	8694	232	205	135	M10	83	2.53	180	163	149
RCK70-80x120	80	120	72	40	46	62	35	9458	236	196	127	M10	83	2.66	183	167	153
RCK70-85x125	85	125	72	40	46	62	35	11167	263	205	142	M10	83	2.79	201	181	164
RCK70-90x130	90	130	72	40	46	62	35	11970	266	196	135	M10	83	2.93	204	185	168
RCK70-95x135	95	135	72	40	46	62	35	13950	294	205	145	M10	83	3.06	220	197	178
RCK70-100x145	100	145	89	46	52	77	45	18295	366	211	145	M12	145	4.54	236	212	192
RCK70-110x155	110	155	89	46	52	77	45	20144	366	192	136	M12	145	4.92	244	221	201
RCK70-120x165	120	165	89	46	52	77	45	26345	439	211	152	M12	145	5.28	277	246	221
RCK70-130x180	130	180	89	46	52	77	45	28135	433	192	137	M12	145	5.52	284	257	234
RCK70-140x190	140	190	98	51	59	84	45	36177	517	192	142	M14	230	7.25	306	275	250
RCK70-150x200	150	200	98	51	59	84	45	43476	580	201	150	M14	230	7.65	333	297	267
RCK70-160x210	160	210	98	51	59	84	45	49466	618	201	150	M14	230	8.16	349	311	280
RCK70-170x225	170	225	98	51	59	84	45	44452	523	160	120	M14	230	8.75	334	307	283
RCK70-180x235	180	235	98	51	59	84	45	48901	543	157	117	M14	230	9.35	345	318	294
RCK70-190x250	190	250	98	51	59	84	45	65000	684	192	146	M14	230	10.80	409	367	331
RCK70-200x260	200	260	98	51	59	84	45	68000	680	184	141	M14	230	11.30	417	376	341

*Minimum outside diameter of hubs manufactured in medium carbon steel with yield strength $\geq 320 \text{ N/mm}^2$.
For hub types, and other materials, refer to page 3.
For assembly and disassembly instructions refer to page 24.