


Needle roller bearings


sealed, with
inner ring

Series NA 49...RS,
NA 49...2RS

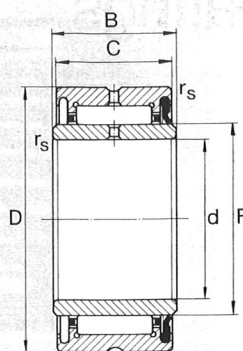

103 064

NA 49...RS

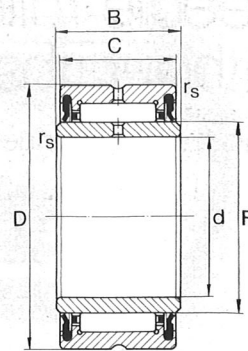

103 065

NA 49...2RS

Dimension table · Dimensions in mm

Shaft diameter	Series		Dimensions							Basic load ratings		Limiting speed n_1 grease ≈ min ⁻¹
	NA 49...RS Sealed on one side Designation	NA 49...2RS Sealed on both sides Designation	Mass g	d	F	D	C	B	r_s min.	dyn. C N	stat. C ₀ N	
10	NA 4900 RS	NA 4900 .2RS	24,5	10	14	22	13	14	0,3	6 800	6 900	13 000
12	NA 4901 RS	NA 4901 .2RS	27,5	12	16	24	13	14	0,3	7 600	8 300	12 000
15	NA 4902 RS	NA 4902 .2RS	37	15	20	28	13	14	0,3	8 600	10 300	10 000
17	NA 4903 RS	NA 4903 .2RS	40	17	22	30	13	14	0,3	8 800	11 000	9 000
20	NA 4904 RS	NA 4904 .2RS	80	20	25	37	17	18	0,3	17 300	19 900	7 500
25	NA 4905 RS	NA 4905 .2RS	89,5	25	30	42	17	18	0,3	19 300	24 200	6 500
30	NA 4906 RS	NA 4906 .2RS	104	30	35	47	17	18	0,3	21 100	28 500	5 500
35	NA 4907 RS	NA 4907 .2RS	175	35	42	55	20	21	0,6	26 500	39 500	4 800
40	NA 4908 RS	NA 4908 .2RS	252	40	48	62	22	23	0,6	36 000	53 000	4 200
45	NA 4909 RS	NA 4909 .2RS	290	45	52	68	22	23	0,6	38 000	59 000	3 900
50	NA 4910 RS	NA 4910 .2RS	295	50	58	72	22	23	0,6	40 000	64 000	3 500