


Radial insert ball bearings with rubber interliner

Spherical or cylindrical outside surface
of interliner
with eccentric locking collar

Series CR-B..
RABR-A..
RABR-B..
RCR-A..
RCR-B..
RCSM-A..
RCSM-B..

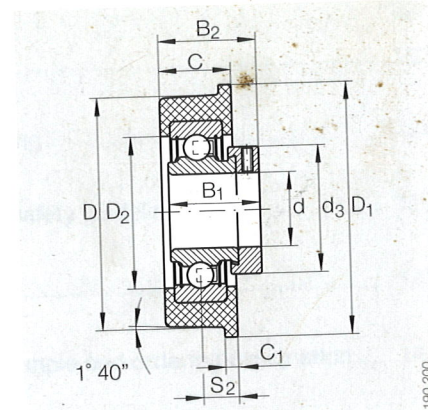

CR-B..

Dimension table · Dimensions in mm

Shaft diameter	Designation			Mass ≈kg	Dimensions					
	Unit	Rubber interliner	Radial insert ball bearing		d	D	D ₁	C	C ₂	C ₁
12	RABR-B 12/47	RABR 39/46	RAE 12 NPPB	0,15	12	47,3	—	17,6	—	—
	RCSM-B 15/65	RCSM 40/65	RAE 15 NPP	0,18	15	65,1	—	25,4	—	—
15	RABR-B 15/47	RABR 39/46	RAE 15 NPPB	0,15	15	47,3	—	18	—	—
	RCSM-B 17/65	RCSM 40/65	RAE 17 NPP	0,18	17	65,1	—	25,4	—	—
17	CR-B 20/83	CR 47/83	RAE 20 NPP	0,3	20	83,6	87,4	25,4	—	4,8
	CR-B 20/76	CR 47/76	RAE 20 NPP	0,3	20	77,5	80	25,4	—	5
	RCSM-B 20/65	RCSM 47/65	RAE 20 NPP	0,22	20	65,1	—	25,4	—	—
	RCR-A 20/46	RCR 42/46	RAE 20 NPP	0,14	20	46	—	18,3	16	—
	RABR-B 20/52	RABR 47/52	RAE 20 NPPB	0,2	20	52,3	—	17,6	—	—
	CR-B 25/83	CR 52/83	RAE 25 NPP	0,32	25	83,6	87,4	25,4	—	4,8
25	CR-B 25/70	CR 52/70	RAE 25 NPP	0,32	25	71,5	76	25	—	5
	CR-B 25/72	CR 52/72	RAE 25 NPP	0,32	25	73	80	25	—	5
	RCSM-B 25/65	RCSM 52/65	RAE 25 NPP	0,24	25	65,1	—	25,4	—	—
	RCR-B 25/57	RCR 52/57	RAE 25 NPP	0,21	25	56,9	—	19,8	17,5	—
	RABR-B 25/62	RABR 52/62	RAE 25 NPPB	0,24	25	62,2	—	20,8	—	—
	CR-B 30/83	CR 62/83	RAE 30 NPP	0,41	30	83,6	87,4	28	—	4,8
30	CR-B 30/92	CR 62/92	RAE 30 NPP	0,41	30	93	98	28	—	5
	RCSM-A 30/65	RCSM 55/65	RAE 30 NPP	0,32	30	65,1	—	25,4	—	—
	RABR-A 30/62	RABR 55/62	RAE 30 NPPB	0,3	30	62,2	—	20,8	—	—
	RABR-B 30/72	RABR 62/72	RAE 30 NPPB	0,38	30	72,2	—	23	—	—
	CR-B 35/110	CR 72/110	RAE 35 NPP	0,56	35	112,3	120	30	—	5
35	RABR-B 35/80	RABR 72/80	RAE 35 NPPB	0,57	35	80,2	—	24	—	—
	RABR-B 40/85	RABR 80/85	RAE 40 NPPB	0,73	40	85	—	27	—	—
40	RABR-B 40/85	RABR 80/85	RAE 40 NPPB	0,73	40	85	—	27	—	—
50	RABR-B 50/100	RABR 90/100	RAE 50 NPPB	0,92	50	100	—	30	—	—