


## Plummer block housing units

Flake graphite cast iron housing  
With long base  
Eccentric locking collar

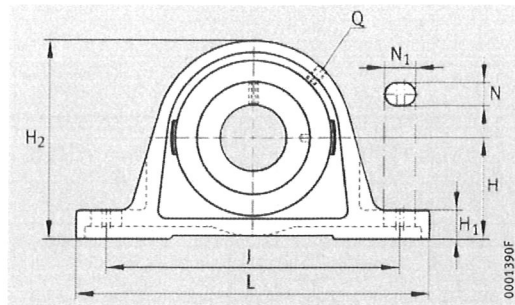

PASE...-XL(-N), RASE...-XL(-N,-FA164), TASE...-XL(-N),  
LASE...-XL(-N), RSAO...-XL

**X-life**

**Dimension table (continued) · Dimensions in mm**

| Designation                         |         |                            | Mass<br><br>m<br><br>≈ kg | Dimensions |      |     |     |    |                |                |                |
|-------------------------------------|---------|----------------------------|---------------------------|------------|------|-----|-----|----|----------------|----------------|----------------|
| Unit                                | Housing | Radial insert ball bearing |                           | d          | H    | J   | L   | A  | A <sub>1</sub> | H <sub>1</sub> | H <sub>2</sub> |
| <b>PASE40-XL-N</b>                  | ASE08   | GRAE40-XL-NPP-B            | 1,84                      | <b>40</b>  | 49,2 | 138 | 179 | 48 | 30             | 19             | 99             |
| <b>RSAO40-XL</b>                    | SAO08   | GNE40-XL-KRR-B             | 3,18                      | <b>40</b>  | 60   | 170 | 220 | 60 | 31             | 22             | 116            |
| <b>LASE40-XL-N<sup>2)</sup></b>     | ASE08   | GE40-XL-KLL-B              | 1,97                      | <b>40</b>  | 49,2 | 138 | 179 | 48 | 30             | 19             | 99             |
| <b>RASE40-XL-FA164<sup>2)</sup></b> | ASE08   | GE40-XL-KRR-B-FA164        | 1,97                      | <b>40</b>  | 49,2 | 138 | 179 | 48 | 30             | 19             | 99             |
| <b>RASE40-XL-N</b>                  | ASE08   | GE40-XL-KRR-B              | 1,95                      | <b>40</b>  | 49,2 | 138 | 179 | 48 | 30             | 19             | 99             |
| <b>TASE40-XL-N</b>                  | ASE08   | GE40-XL-KTT-B              | 1,96                      | <b>40</b>  | 49,2 | 138 | 179 | 48 | 30             | 19             | 99             |
| <b>PASE45-XL</b>                    | ASE09   | GRAE45-XL-NPP-B            | 2,15                      | <b>45</b>  | 54   | 150 | 192 | 48 | 32             | 21,5           | 107            |
| <b>LASE45-XL<sup>2)</sup></b>       | ASE09   | GE45-XL-KLL-B              | 2,3                       | <b>45</b>  | 54   | 150 | 192 | 48 | 32             | 21,5           | 107            |
| <b>RASE45-XL</b>                    | ASE09   | GE45-XL-KRR-B              | 2,28                      | <b>45</b>  | 54   | 150 | 192 | 48 | 32             | 21,5           | 107            |
| <b>TASE45-XL</b>                    | ASE09   | GE45-XL-KTT-B              | 2,28                      | <b>45</b>  | 54   | 150 | 192 | 48 | 32             | 21,5           | 107            |
| <b>PASE50-XL-N</b>                  | ASE10   | GRAE50-XL-NPP-B            | 2,59                      | <b>50</b>  | 57,2 | 158 | 200 | 54 | 34             | 21,5           | 115            |
| <b>LASE50-XL-N<sup>2)</sup></b>     | ASE10   | GE50-XL-KLL-B              | 2,82                      | <b>50</b>  | 57,2 | 158 | 200 | 54 | 34             | 21,5           | 115            |
| <b>RASE50-XL-FA164<sup>2)</sup></b> | ASE10   | GE50-XL-KRR-B-FA164        | 2,82                      | <b>50</b>  | 57,2 | 158 | 200 | 54 | 34             | 21,5           | 115            |
| <b>RASE50-XL-N</b>                  | ASE10   | GE50-XL-KRR-B              | 2,8                       | <b>50</b>  | 57,2 | 158 | 200 | 54 | 34             | 21,5           | 115            |
| <b>TASE50-XL-N</b>                  | ASE10   | GE50-XL-KTT-B              | 2,8                       | <b>50</b>  | 57,2 | 158 | 200 | 54 | 34             | 21,5           | 115            |
| <b>RSAO50-XL</b>                    | SAO10   | GNE50-XL-KRR-B             | 6,1                       | <b>50</b>  | 75   | 212 | 275 | 75 | 39             | 27             | 143            |
| <b>PASE55-XL</b>                    | ASE11   | GRAE55-XL-NPP-B            | 2,79                      | <b>55</b>  | 63,5 | 176 | 222 | 60 | 35             | 22,5           | 124,5          |
| <b>RASE55-XL</b>                    | ASE11   | GE55-XL-KRR-B              | 3,4                       | <b>55</b>  | 63,5 | 176 | 222 | 60 | 35             | 22,5           | 124,5          |
| <b>TASE55-XL</b>                    | ASE11   | GE55-XL-KTT-B              | 3,51                      | <b>55</b>  | 63,5 | 176 | 222 | 60 | 35             | 22,5           | 124,5          |
| <b>PASE60-XL-N</b>                  | ASE12   | GRAE60-XL-NPP-B            | 4,35                      | <b>60</b>  | 69,9 | 190 | 240 | 60 | 42             | 25             | 140            |
| <b>RSAO60-XL</b>                    | SAO12   | GNE60-XL-KRR-B             | 9                         | <b>60</b>  | 85   | 250 | 330 | 85 | 46             | 32             | 165            |
| <b>RASE60-XL-FA164<sup>2)</sup></b> | ASE12   | GE60-XL-KRR-B-FA164        | 4,79                      | <b>60</b>  | 69,9 | 190 | 240 | 60 | 42             | 25             | 140            |
| <b>RASE60-XL-N</b>                  | ASE12   | GE60-XL-KRR-B              | 4,79                      | <b>60</b>  | 69,9 | 190 | 240 | 60 | 42             | 25             | 140            |
| <b>TASE60-XL-N</b>                  | ASE12   | GE60-XL-KTT-B              | 4,77                      | <b>60</b>  | 69,9 | 190 | 240 | 60 | 42             | 25             | 140            |
| <b>RASE65-214-XL<sup>3)</sup></b>   | ASE14   | GE65-214-XL-KRR-B          | 6,41                      | <b>65</b>  | 79,4 | 203 | 260 | 65 | 44             | 27,5           | 156            |
| <b>TASE65-214-XL<sup>3)</sup></b>   | ASE14   | GE65-214-XL-KTT-B          | 6,41                      | <b>65</b>  | 79,4 | 203 | 260 | 65 | 44             | 27,5           | 156            |

<sup>1)</sup> To be ordered separately.

The caps are suitable for temperatures from -20 °C to +80 °C.

<sup>2)</sup> With fitted lubrication nipple.

<sup>3)</sup> Alternative ball set 6214.